

645E1

ENGINE MAINTENANCE MANUAL



645E1

BLOWER-TYPE ENGINE MAINTENANCE MANUAL


5th Edition

June 1980



• • • • **A Service Department Publication** • • • •

Electro-Motive Division Of General Motors La Grange, Illinois 60525

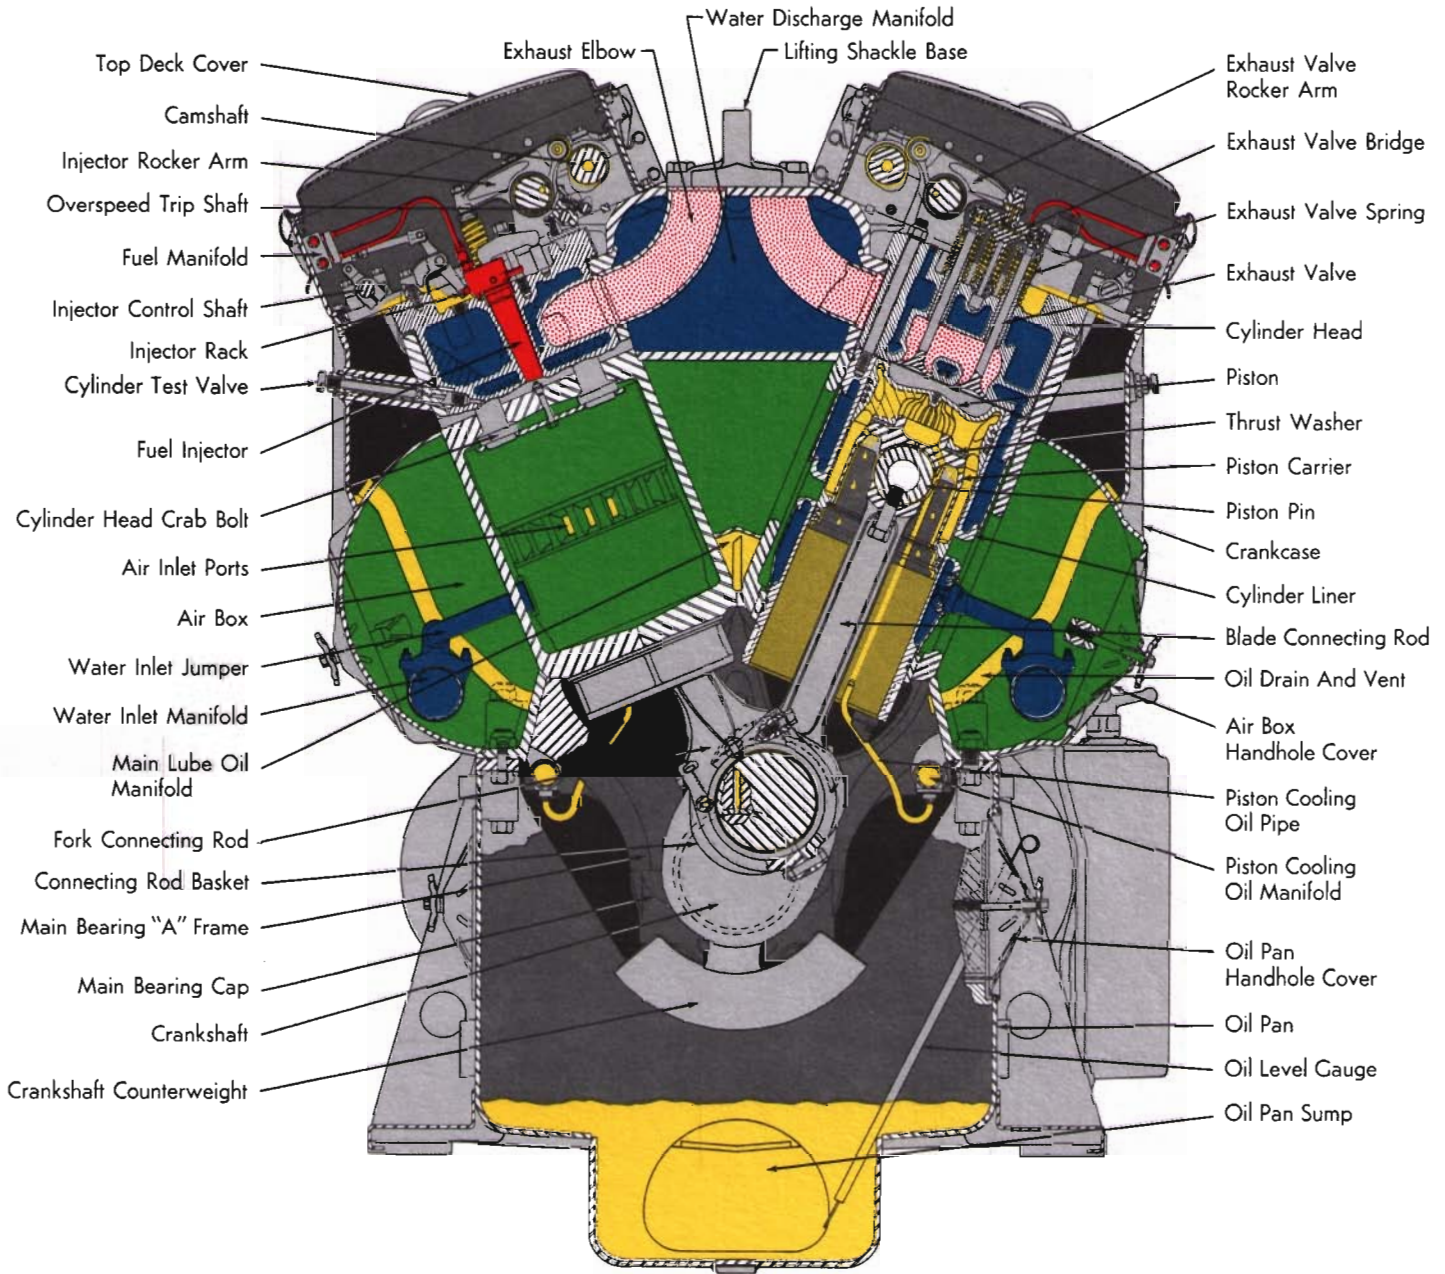

SCAVENGING AIR
 LUBRICATING OIL
 EXHAUST
 WATER
 FUEL OIL

645 SERIES DIESEL ENGINE

ELECTRO-MOTIVE DIVISION
 GENERAL MOTORS CORPORATION
 LA GRANGE, ILLINOIS, U.S.A.

LP-2 U.S.A.

PLATE 13003

FOREWORD

This manual contains maintenance information for the 8, 12, and 16-cylinder Model 645E1 diesel engines. The material describes the basic engine and common extra equipment. However, the coverage of any particular system or component does not imply that the equipment is part of any specific order.

The illustrations generally depict the 16-cylinder model as representative of the location, size, and relative shape of various components and accessories.

Units of measurement appearing in this manual are shown in metric units and U.S. standard units. A conversion table is provided to convert U.S. standard to metric units.


Special tools, referred to in the text and shown in many of the illustrations, are not supplied with the engine, but are available on order.

File numbers contained in this manual represent detailed drawings for the construction of fabricated tooling. These drawings are available from Electromotive Service Department.

References, specifications, and a list of service equipment are presented as Service Data at the end of most sections.


Clearance and dimensional limits listed in Service Data are defined as follows:

1. New limits are those to which new parts are manufactured. (Drawing tolerances.)
2. Minimum, maximum, and tolerance measurements are provided as service limits. At time of rebuild or any time unscheduled maintenance is performed, the service limits should *not* be exceeded. Engine components within these limits may be reused with the assurance that they will perform satisfactorily until the next scheduled overhaul.

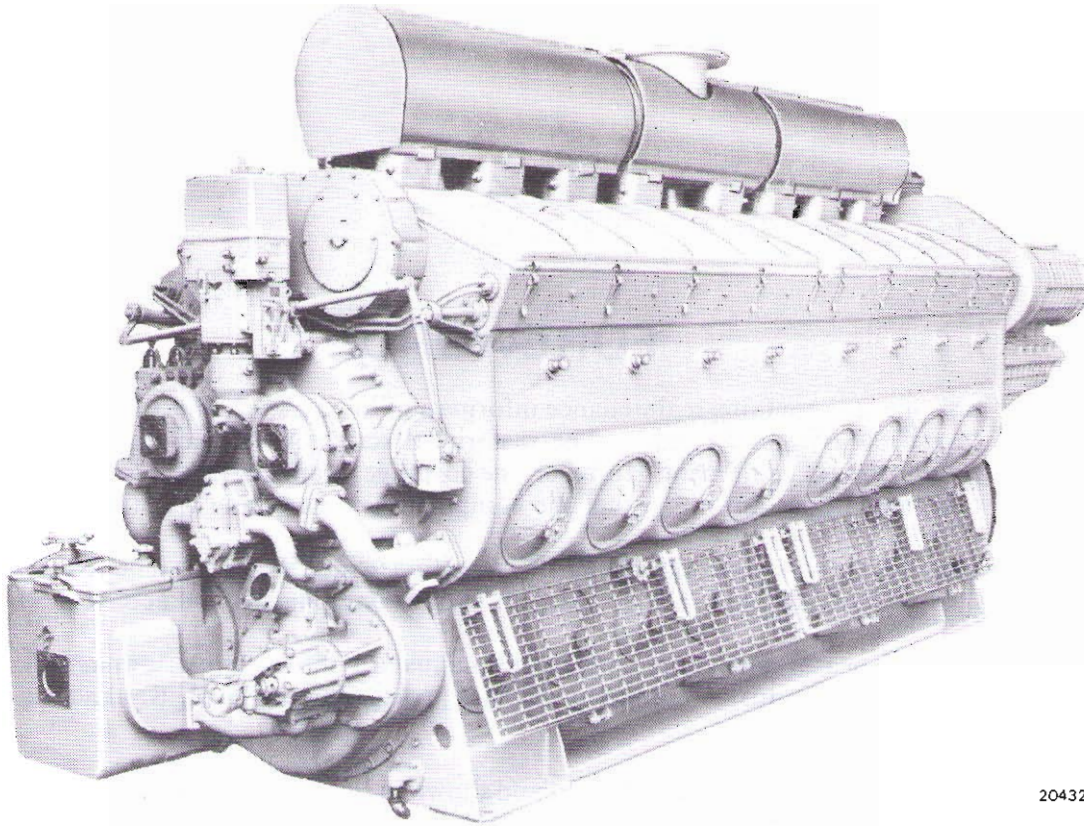

20432

Three-Quarter Left Front View, 16-Cylinder Engine

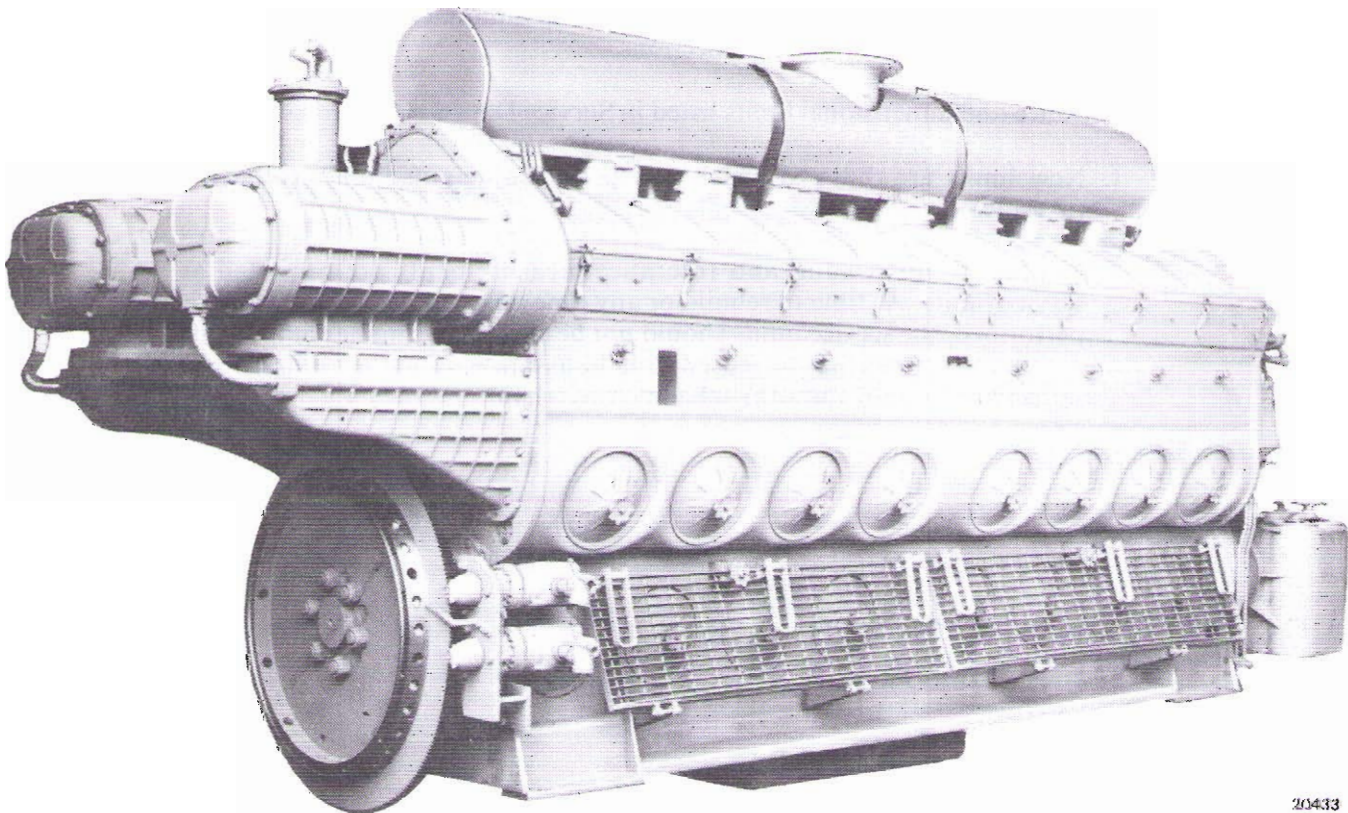

20433


Three-Quarter Right Rear View, 16-Cylinder Engine

INDEX


	<u>Section</u>
ENGINE INFORMATION	0
CRANKCASE AND OIL PAN	1
CYLINDER HEAD AND ACCESSORIES	2
PISTON ASSEMBLY AND CONNECTING RODS	3
CYLINDER LINER	4
CYLINDER POWER ASSEMBLY	5
CRANKSHAFT ASSEMBLY AND ACCESSORY DRIVE GEAR TRAIN	6
CAMSHAFT GEAR TRAIN, AUXILIARY DRIVE, AND CAMSHAFT ASSEMBLIES	7
AIR INTAKE AND EXHAUST SYSTEMS	8
LUBRICATING OIL SYSTEM	9
COOLING SYSTEM	10
FUEL SYSTEM	11
GOVERNOR	12
PROTECTIVE DEVICES	13
STARTING SYSTEM	14
TROUBLESHOOTING	15

TABLE OF FREQUENTLY USED UNITS

Multiply	by	to get equivalent number of:
LENGTH		
Microinch	.025 4	micron (μ)
Inch	25.4	millimetres (mm)
Foot	0.304 8	metres (m)
Yard	0.914 4	metres
Mile	1.609	kilometres (km)
AREA		
Inch ²	645.2	millimetres ² (mm ²)
	6.45	centimetres ² (cm ²)
Foot ²	0.092 9	metres ² (m ²)
Yard ²	0.836 1	metres ²
VOLUME		
Ounce	29.574	centimetre ³ (cm ³)
Inch ³	16 387.	mm ³
	16.387	cm ³
	0.016 4	litres (l)
Ft ³	0.028 3	metre ³ (m ³)
Quart	0.946 4	litres
Gallon	3.785 4	litres
Yard ³	0.764 6	metres ³ (m ³)
MASS		
Ounce	28.350	grams (g)
Pound	0.453 6	kilograms (kg)
Ton	907.18	kilogram
Ton	0.907	tonne (t)
FORCE		
Kilogram	9.807	newtons (N)
Ounce	0.278	newtons
Pound	4.448	newtons
TEMPERATURE		
Degree Fahrenheit	$(t^{\circ}F - 32) \div 1.8$	degree Celsius (C)

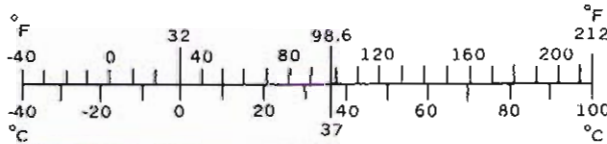

Multiply	by	to get equivalent number of:
ACCELERATION		
Foot/sec ²	0.304 8	metre/sec ² (m/s ²)
Inch/sec ²	0.025 4	metre/sec ²
TORQUE		
Ounce-force-inch	0.007 06	newton-metre
	0.069 2	kilogram-metre
Pound-inch	0.112 98	newton-metres (N·m)
	0.011 52	kilogram-metres
Pound-foot	1.355 8	newton-metres
	0.138 25	kilogram-metres
POWER		
Horsepower	0.746	kilowatts (kW)
PRESSURE OR STRESS		
Inches of water	0.249 1	kilopascals (kPa)
Pounds/sq. in.	6.895	kilopascals
ENERGY OR WORK		
BTU	1 055.	joules (J)
Foot-pound	1.355 8	joules
Kilowatt-hour	3 600 000 or 3.6×10^6	joules (J = one W's)
LIGHT		
Footcandle	10.764	lumens/metre ² (lm/m ²)
FUEL PERFORMANCE		
Miles/gal	0.425 1	kilometres/litre (km/l)
Gal/mile	2.352 7	litres/kilometre (l/km)
VELOCITY		
Miles/hour	1.609 3	kilometres/hr. (km/h)

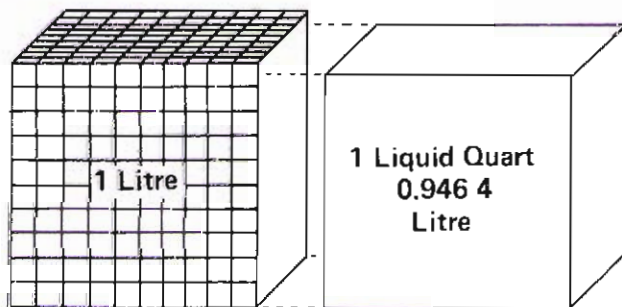

The comparative dimensions of an inch and a millimeter, a litre and a quart, and a kilogram and a pound are shown.

